

HD55DTH




HD55 Hammers

Item Description

Weight Kg

Part Number

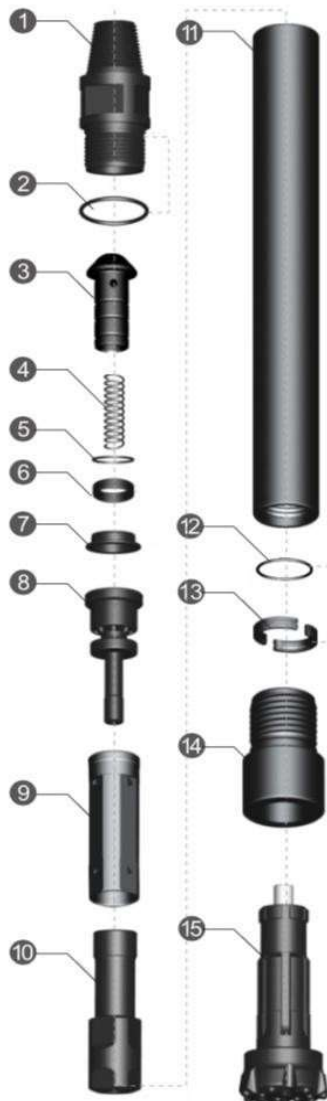

1	Top Sub	15.0	HD55-TSUB
2	"O" Ring of Top Sub	0.01	HD55-SR-TSUB
3	Check Valve	1.00	HD55-CVALVE
4	Spring	0.04	HD55-SPRING
5	Ring	0.10	HD55-RING
6	Compression Buffer	0.06	HD55-CBUFFER
7	Compression Buffer Seat	0.40	HD55-SBS
8	Air Distributor	4.00	HD55-DIST
9	Internal Cylinder	4.70	HD55-ICYL
10	Piston	15.50	HD55-PISTON
11	External Cylinder	30.00	HD55-ECYL
12	"O" Ring of Stop Ring	0.01	HD55-SR-SRING
13	Stop Ring	0.30	HD55-SRING
14	Drive Chuck	6.40	HD55-DCHUCK
15	Drill Bit		HD55-140FF-TV

Length (less bit)	Weight (less bit)	External Diameter	Bit Shank	Hole Range	Connection Thread
1214 mm	77.5 Kg	Ø125 mm	DHD350	Ø140Ø-152	API 3 ½ REG
Box size	Impact rate at 1.7 Mpa	Recommended Rotation Speed		Air Consumption 250-350 (PSI)	
1290x150x175 mm	25Hz	20-35 rpm		500-800 (CFM)	

Diameter		N Button Diameter. mm	Button Angler	Flushing Holes	Weight	Part Number
140	5 1/2	8x14	38	2	15.0	HD55-140CC-TPD
146	5 3/4	8x14	38	2	15.2	HD55-146CC-TPD
152	6	10x14	38	2	15.6	HD55-152CC-TPD
165	6 1/2	14x14	38	2	15.8	HD55-165CC-TPD
178	7	8x15	38	2	16.1	HD55-178CC-TPD